


Horizontal Gear Shifter – 925 Series

Industrial HGS Systems

Based on the proven quality and performance of Cablecraft® low friction control cables, our manual transmission shifter system provides a maintenance-free, cost-effective approach that makes remote shifting easier to build and use.

Common Applications: Center console mounted shifter, servo and non-servo assisted transmissions, bus, coach and truck applications, heavy to medium duty plant and agricultural vehicles, heavy to medium duty cable applications

- Easy installation, adjustment free
- Maintenance-free life
- Ends gear jump out
- Clean precise shifts
- No knob-to-cab relative movement in floating cabs
- No action required to tilt cab
- Vibration from drive train is not transmitted
- Reduced cab noise levels
- Installation design to customer requirements
- Flexible capability with different cable end fittings

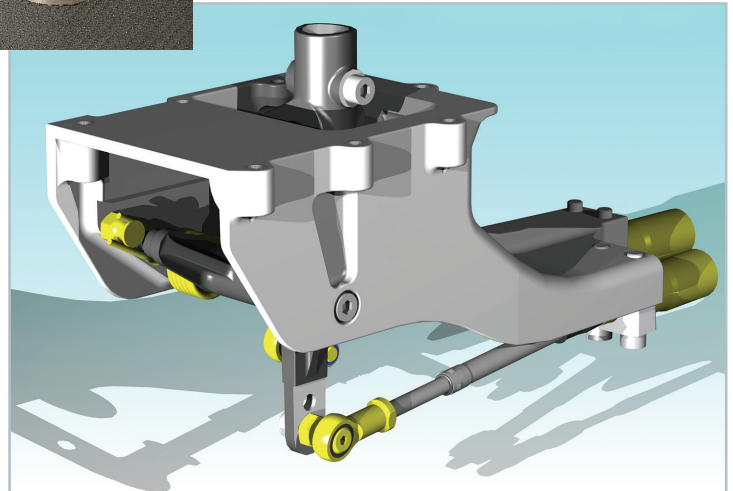

Cablecraft®
Motion Controls




**Connecting a World
in Motion**

Horizontal Gear Shifter – 925 Series

Technical Data

- Recommended handle lengths:
305mm to 380mm (12" - 15" approx.)
- Normal working load @ knob = 3 kg (6.6 lb.)
to 5 kg (11 lb.)
- Accidental overload @ knob = 100kg (220 lb.)
- Operating temperatures: -40°C to 120°C
(-40°F to 248°F)
- Weight: 3.0kg (6.6 lb.)

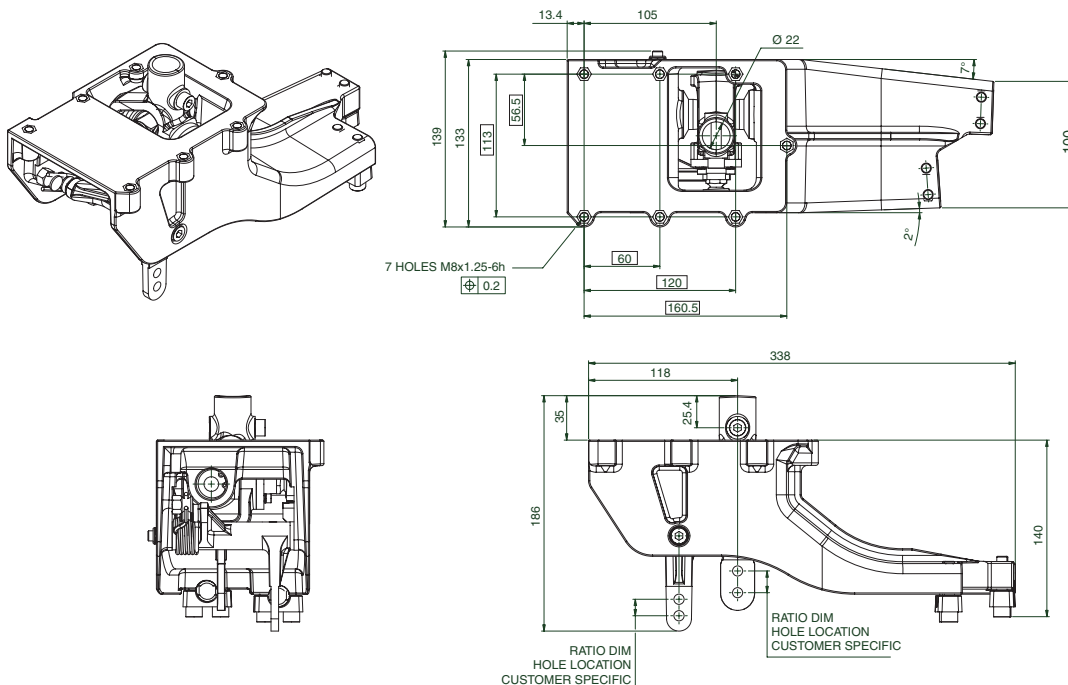

Distributed by:

Cablecraft®
Motion Controls

2110 Summit Street
New Haven, Indiana USA 46774
Tel 260 749-5105 Fax 260 749-5677

4401 South Orchard Street
Tacoma, Washington USA 98466
Tel 253 475-1080 Fax 253 474-1623

www.cablecraft.com

2789 Old Belleville Road
St. Matthews, South Carolina USA 29135
Tel 803 655-7300 Fax 803 874-3558

Diplocks Way-South Road
Hailsham, E. Sussex BN27 3JF, England
Tel (011-44) 1323-841510 Fax (011-44) 1323-845848

Warning: Since the manufacturer is unable to determine all applications in which a part may be placed, it is the user's responsibility to determine the suitability of the part for its intended use. This is especially true where safety is a factor. Incorrect application or installation may result in property damage, bodily injury, or death. For technical assistance, call 260-749-5105.