

# Pull-Only Clutch Control Cables

## Control Cable Assembly

This flexible control is designed to transmit pull motion between two mechanical devices without the use of rods, bellcranks, or other rigid mechanical linkage. Simple to install and easy to maintain, these versatile pull controls are specifically designed for applications that require a high load capability and low deflection.

**Common Applications:** Clutch controls, heavy-duty lanyards

- Custom engineered assembly
- Installed bend radius down to 5 inches
- Sealed and lubricated for life

**Material:**

- Nylon covered innermember
- Plastic covered conduit

**Suggested End Fittings:**


- Clevis




## Pull-Only Clutch Specifications

Generic clutch replacement cables HD conduit, special clutch innermember  
Part No. CA235-A-L (5/16-24 end rods), Part No. CA236-A-L (3/8-24 end rods)


Order Code: A = Conduit length; L = Length overall

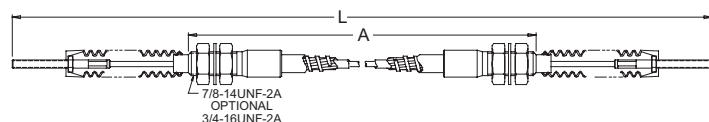

General Motors® style clutch cable, 1500 lb brake conduit and innermember  
Part No. CA270-A-L (A = Conduit length; L = Length overall)



General Motors® style clutch cable, 1500 lb brake conduit and innermember  
Part No. CA270-XXX (XXX = Dash number, see table below)



### CA270-XXX

| Dash No. | GM® Part No. | A     | L     |
|----------|--------------|-------|-------|
| -010     | 15520115     | 47.56 | 76.69 |
| -009     | 15518380     | 43.31 | 71.65 |
| -008     | 15518379     | 51.18 | 79.53 |
| -007     | 15518378     | 44.88 | 74.21 |
| -006     | 15518377     | 37.60 | 66.93 |
| -005     | 15507983     | 44.55 | 69.01 |
| -004     | 15507982     | 26.00 | 52.75 |
| -003     | 15507981     | 45.27 | 72.91 |
| -002     | 15507980     | 44.49 | 72.95 |
| -001     | 15507979     | 40.94 | 68.07 |

GM is a registered trademark of General Motors.


**Cablecraft®**  
Motion Controls




**Connecting a World  
in Motion**

# Pull-Only Clutch Control Cables

Mack Truck® style clutch cable, HD conduit and special clutch innermember  
Part No. CA312-A-L (A = Conduit length; L = Length overall; see table below)



Mack Truck® style clutch cable, HD conduit and special clutch innermember  
Part No. CA312-A-L (A = Conduit length; L = Length overall)

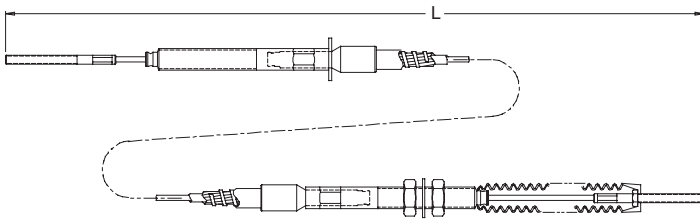

## CA312-A-L


| Part No.          | A     | L     | Part No.          | A     | L     |
|-------------------|-------|-------|-------------------|-------|-------|
| CA312-34.6-42.0   | 34.6  | 42.0  | CA312-55.6-66.0   | 55.5  | 66.0  |
| CA312-55.6-63.0   | 55.6  | 63.0  | CA312-67.6-78.0   | 67.6  | 78.0  |
| CA312-79.6-87.0   | 79.6  | 87.0  | CA312-79.6-90.0   | 79.6  | 90.0  |
| CA312-85.6-93.0   | 85.6  | 93.0  | CA312-85.6-96.0   | 85.6  | 96.0  |
| CA312-91.6-99.0   | 91.6  | 99.0  | CA312-91.6-102.0  | 91.6  | 102.0 |
| CA312-102.6-110.0 | 102.6 | 110.0 | CA312-103.6-114.0 | 103.6 | 114.0 |
| CA312-127.6-135.0 | 127.6 | 135.0 | CA312-118.6-129.0 | 118.6 | 129.0 |
| CA312-25.6-36.0   | 25.6  | 36.0  | CA312-29.6-40.0   | 29.6  | 40.0  |
| CA312-34.6-45.0   | 34.6  | 45.0  | CA312-95.6-106.0  | 95.6  | 106.0 |
| CA312-43.6-54.0   | 43.6  | 54.0  | CA312-107.6-118.0 | 107.6 | 118.0 |

## High Performance Clutch Cables


HD conduit, brake/clutch innermember 500 lb. pull-only operating load.

Order Code: T = Travel 2"- 6" L = Length overall


Part No. A183-400-T-L (5/16-24 end rods MD) Grooved-Grooved  
Part No. A183-111-T-L (3/8-24 end rods HD) Grooved-Grooved



Part No. A183-401-T-L (5/16-24 end rods MD) Grooved-Threaded 11/16-16  
Part No. A183-110-T-L (3/8-24 end rods HD) Grooved-Threaded 7/8-14



Part No. A183-402-T-L (5/16-24 end rods MD)  
Threaded-Threaded (both ends 11/16-16)  
Part No. A183-104-T-L (3/8-24 end rods HD)  
Threaded-Threaded (both ends 7/8-14)



Distributed by:

**Cablecraft®**  
Motion Controls

2110 Summit Street  
New Haven, Indiana USA 46774  
Tel 260 749-5105 Fax 260 749-5677

4401 South Orchard Street  
Tacoma, Washington USA 98466  
Tel 253 475-1080 Fax 253 474-1623

**www.cablecraft.com**

2789 Old Belleville Road  
St. Matthews, South Carolina USA 29135  
Tel 803 655-7300 Fax 803 874-3558

Diplocks Way-South Road  
Hailsham, E. Sussex BN27 3JF, England  
Tel (011-44) 1323-841510 Fax (011-44) 1323-845848

**Warning:** Since the manufacturer is unable to determine all applications in which a part may be placed, it is the user's responsibility to determine the suitability of the part for its intended use. This is especially true where safety is a factor. Incorrect application or installation may result in property damage, bodily injury, or death. For technical assistance, call 260-749-5105.