

Non-Lock Control Heads

Push-Pull Control Head

These panel or bracket mounted units are intended for light to moderate loads. They are cost effective solutions to mechanically connecting a manual input source to a remote output.

Common Applications: Engine shut down, engine choke, latch operation, valve operation

- Especially effective when space is limited or rod linkage and bell cranks are not suitable choices
- Various T-handles/knobs with or without functional identifications, as well as output end configurations are available

Technical:

- Load: 50 lb. maximum
- Travel: 3" maximum
- Threaded mount

Material:

- Plated carbon steel corrosion-proof control heads



Cablecraft® Ordering Codes



	2	-	1	-	L	-	3	-	2	-	DF	-	(6)	-	3	-	120	
Control Head Type	2		1		L		3		2		DF		(6)		3		120	
2 = Micro Adjust																		
5 = Twist Lock with 2.38" Plastic Handle																		
6 = Twist Lock with 3.5" Metal Handle																		
7 = Non Lock with 3/8"-24 UNF Mounting																		
8 = Non Lock with 7/16"-20 UNF Mounting																		
9 = Non Lock with 5/8"-18 UNF Mounting																		
Cable Type																		
1 = Low Friction-EXT 3 = Low Friction 6 = Utility 9 = Bristow																		
Cable Size																		
V = Very Light Duty L = Light Duty																		
Stainless Steel Options																		
0 = Carbon Steel Fittings																		
3 = with Stainless Steel End Rod																		
4 = with Stainless Steel End Rod, Support Tube and Innermember Armor																		
Output End Fittings																		
0 = See Illustration 2 = Threaded Swivel 3 = Grooved Swivel																		
Cable Options																		
D = Disconnect Feature F = Friction Lock Accessory																		
Seal Options (Use this number only if requesting optional seals)																		
5 = Improved Model 5 Wiper Seal is Standard on Low Friction-EXT & Utility																		
6 = Model 6 Wiper Seal, Optional on All Controls																		
Cable Travel 1" - 3" (For output fittings style 2 & 3 only)																		
Overall Length (See overall length dimension points indicated on each illustration)																		
Knob Option																		

Cablecraft®
Motion Controls




Connecting a World
in Motion

Non-Lock

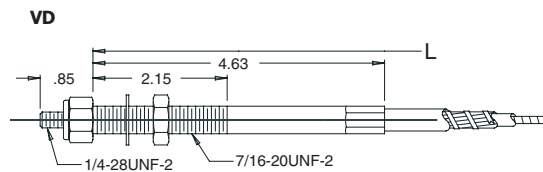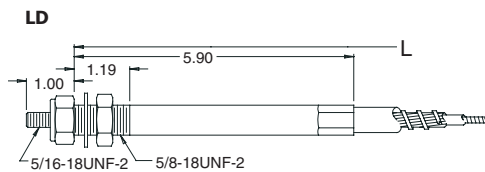

Knob Options

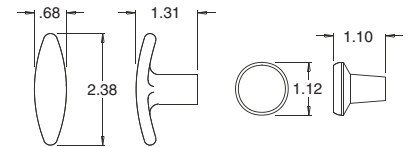

All line art dimensions are represented in inches

	Extended Dimensions	Non Lock VLD	Non Lock LD	Twist Lock	Micro Adjust	
VLD 	"A"	81V32		51V32	21V32DF	
	1" 4.94"	81V42		51V42	21V42DF	EXT
	2" 6.94"	86V32		56V32	26V32DF	
	3" 8.94"	86V42		56V42	26V42DF	UTL
VLD 	"A"	81V33		51V33	21V33DF	EXT
	1" 4.25"	81V43		51V43	21V43DF	EXT
	2" 6.25"	86V33		56V33	26V33DF	UTL
	3" 8.25"	86V43		56V43	26V43DF	UTL
LD 	"A"		91L32	51L32	21L32DF	EXT
	1" 5.18"		91L42	51L42	21L42DF	
	2" 7.18"		96L32	56L32	26L32DF	UTL
	3" 9.18"		96L42	56L42	26L42DF	UTL
LD 	"A"		91L33	51L33	21L33DF	UTL
	1" 4.56"		91L43	51L43	21L43DF	
	2" 6.56"		96L33	56L33	26L33DF	UTL
	3" 8.56"		96L43	56L43	26L43DF	UTL
VLD 		79V00		59V00	29V00	BRIS
LD 		79V04		59V04	29V04	
		79V05		59V05	29V05	

Distributed by:

Cablecraft
Motion Controls

2110 Summit Street
New Haven, Indiana USA 46774
Tel 260 749-5105 Fax 260 749-5677

4401 South Orchard Street
Tacoma, Washington USA 98466
Tel 253 475-1080 Fax 253 474-1623

www.cablecraft.com

2789 Old Belleville Road
St. Matthews, South Carolina USA 29135
Tel 803 655-7300 Fax 803 874-3558

Diplocks Way-South Road
Hailsham, E. Sussex BN27 3JF, England
Tel (011-44) 1323-841510 Fax (011-44) 1323-845848

Warning: Since the manufacturer is unable to determine all applications in which a part may be placed, it is the user's responsibility to determine the suitability of the part for its intended use. This is especially true where safety is a factor. Incorrect application or installation may result in property damage, bodily injury, or death. For technical assistance, call 260-749-5105.